

# Installation Instructions

## 8800 Series




### Adams Rite Exit Device modified by Command Access Technologies

**STEP 1:** Once the device is mounted per the manufacturer's instructions, the door must be prepped for a Energy Transfer Hinge (ETH), Concealed Door Loop (CDL) or Surface Mount Door Loop (SMDL).

**STEP 2:** Make sure that all power is off. The exit device comes with 48" leads. If you are using a door loop, you may want to run the 48" leads through the loop and make your terminations on the frame side. Otherwise, run your power source wires from the frame side through the ETH, CDL or SMDL and into the exit device through the prepared holes and make your terminations at the device.

**STEP 3:** Connect the wires at the power supply and test the operation.

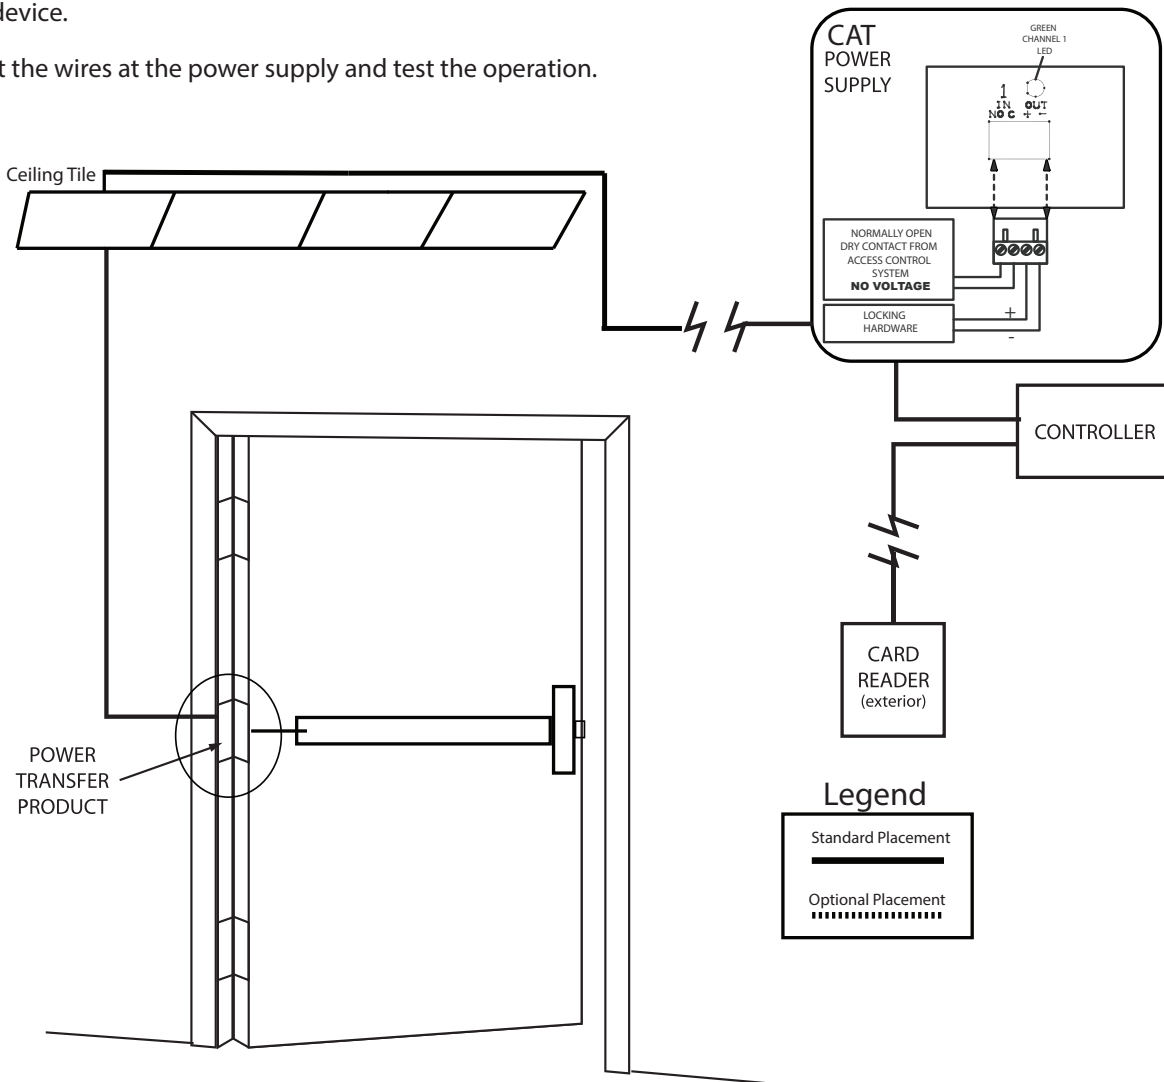

### LEGEND OF TERMS

**EU:** (Fail Secure) When power is applied, the outside trim will unlock. When power is removed, the exit device locks.

**REX:** (Request to Exit Switch) Monitors the inside handle.

### ELECTRICAL SPECIFICATIONS

#### SOLENOIDS:

VOLTS	CURRENT	COIL RESISTANCE
24VAC/DC	330mA	73.0 Ohms +/- 10%
12VAC/DC	900mA	14 Ohms +/- 10%

**SWITCHES:** .5A 24VAC/DC

**REX:** Green - Common (C)  
Blue - Normally Open (NO)  
Gray - Normally Closed (NC)

**Template for Adams Rite 8800 Exit Devices**

**Please refer to manufacturer's original template**